




MARSALA


Design Guide

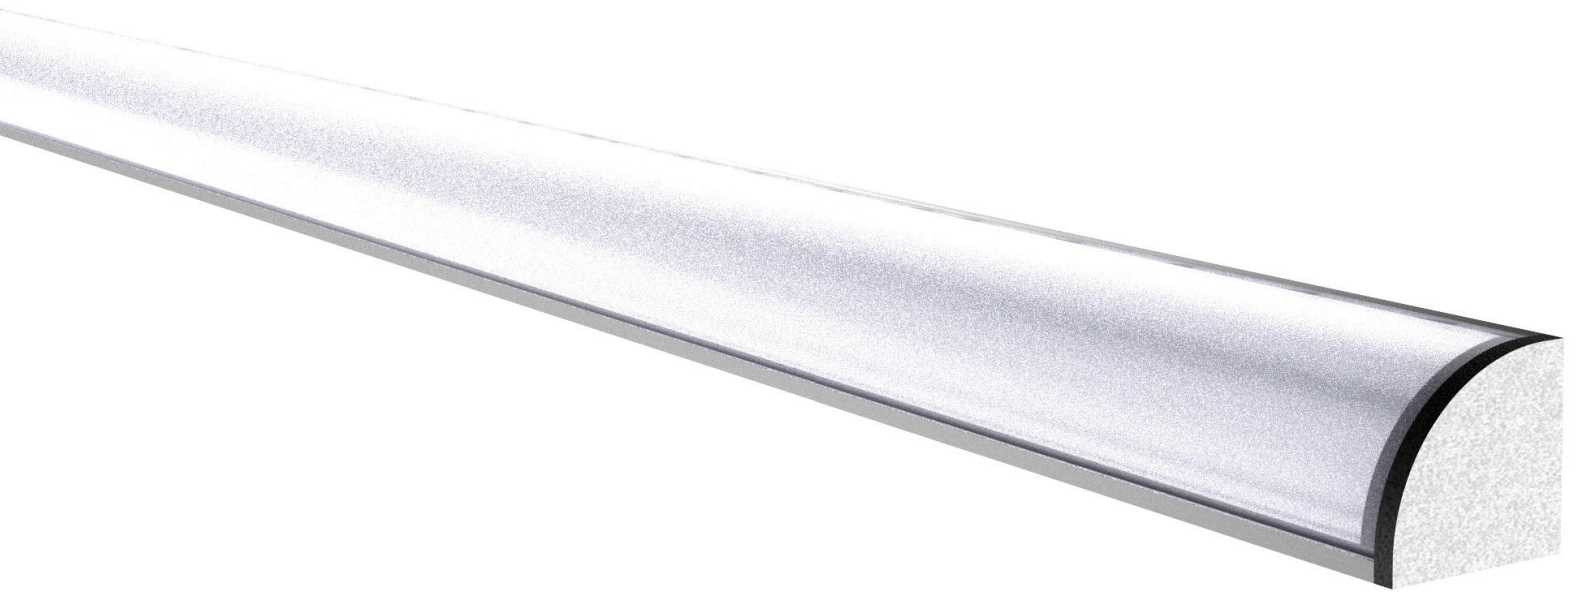

Ceiling




Wall





Direct
Symmetric




PROFILE DIMENSIONS

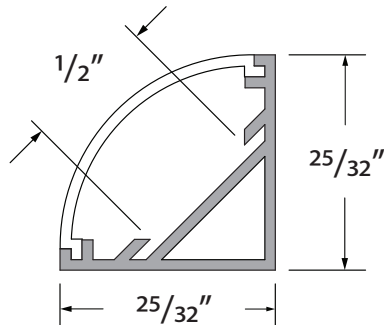

AVAILABLE TIVOTAPE™ OPTIONS

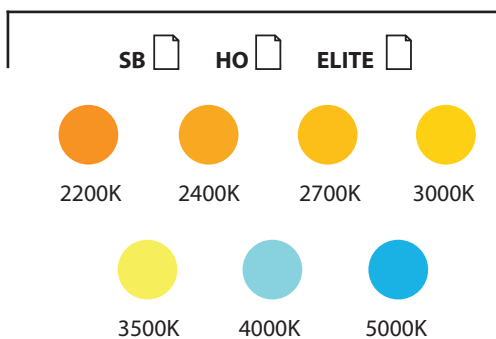

ORDERING INFORMATION



MRSL-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



MRSL-LNS-OPL-6.5
Lens, opal, length 6.5'



MRSL-LNS-CLR-6.5
Lens, clear, length 6.5'



MRSL-LNS-DIF-6.5
Lens, diffuser, length 6.5'



MRSL-EC-01
Solid End Cap




MRSL-EC-02
Powerfeed End Cap



MRSL-CLP-SLV
Clip, Silver

PHOTOMETRICS BASED ON 3000K/HO/ELITE TIVOTAPE

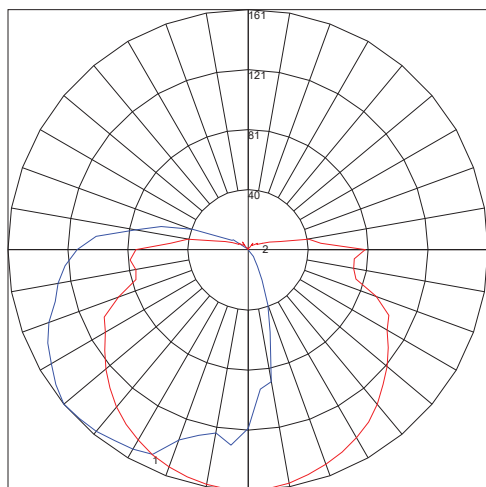


MARSALA WITH CLEAR LENS

Lumens per foot: 435.52

Watts per foot: 4

CRI : 95.1

Peak Candela: 119.82

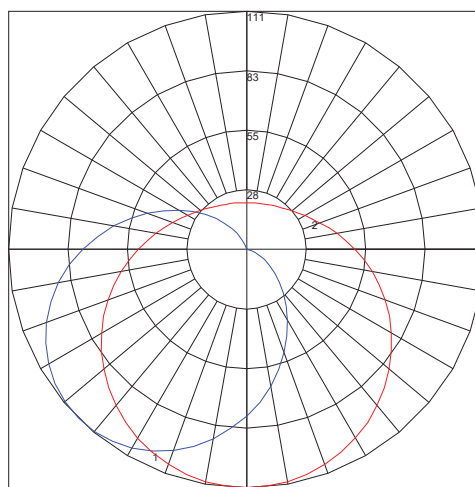

MARSALA WITH DIFFUSED LENS

Lumens per foot: 359.48

Watts per foot: 4

CRI : 95.7

Peak Candela: 110.98

