

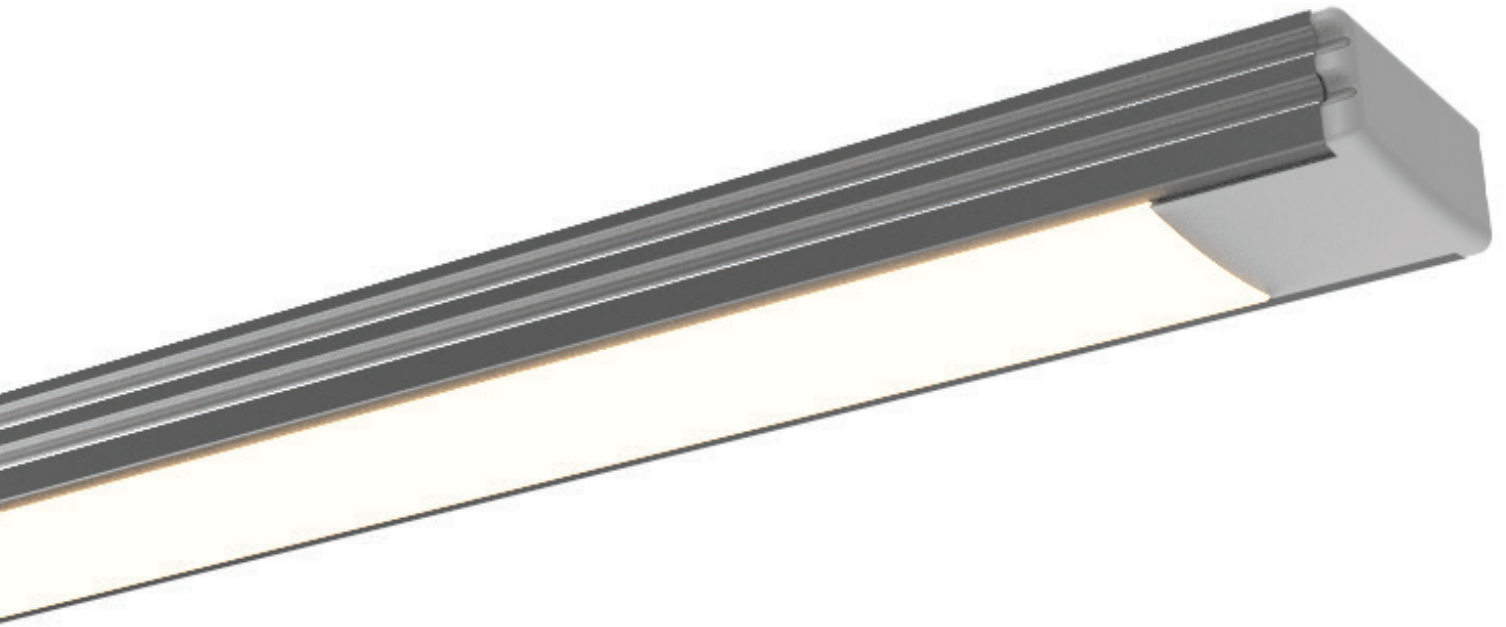


MINI
Design Guide

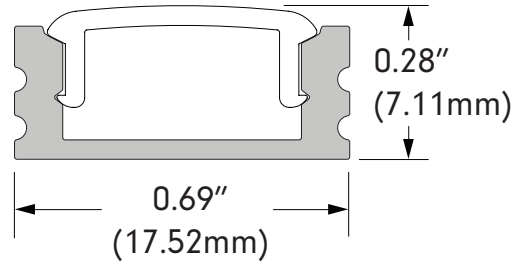

Profile & Dimensions

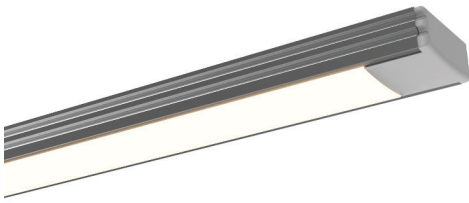

Available TivoTape Options - Indoor

DEFINE
LB
SB
HO

ELITE
SB
HO
VHO

ELITE+
Standard
Pro
Vision
Flow

FUSE24
RGB
RGBW

FUSE12
PiXEL RGB


Available TivoTape Options - Outdoor

DEFINE
SB
LB

FUSE24
RGB

FUSE12
PiXEL RGB

Ordering Information



MINI-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths




MINI-LNS-XX-6.5
XX = OP (Opal), **DIF** (Diffuser)
PC lens, sold in 6.5' lengths



MINI-LNS-SIL-XX
XX = 50 (50'), **100** (100')
Silicone lens, sold by roll



MINI-MTBK
Mounting Clip



MINI-EC-01
Solid End Cap




MINI-EC-02
Powerfeed End Cap



MINI-ADJ-MTBK
Adjustable Mounting Clip

Photometrics (based on 27K DW)

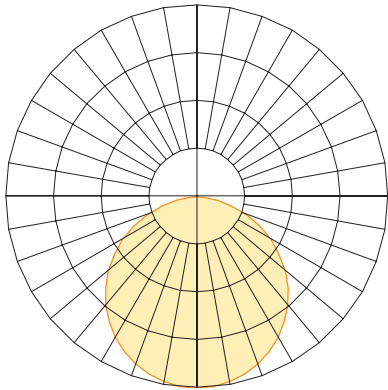

MINI WITH 2700K DW
Delivered Lumens per foot: 112
Watts per foot: 3.3
CRI : 98
Peak Candela: 39.6

Diode Visibility



Opal lens



Silicone lens



Diffused lens

