MOFFETT
Design Guide

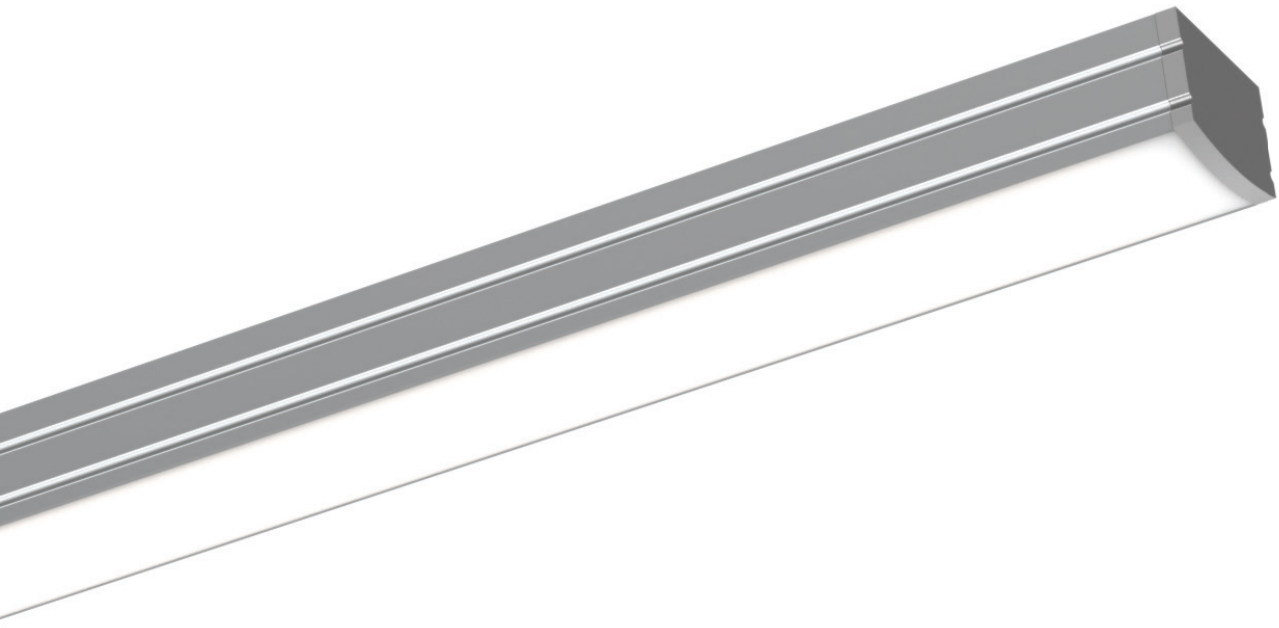

tivoli®

Profile & Dimensions

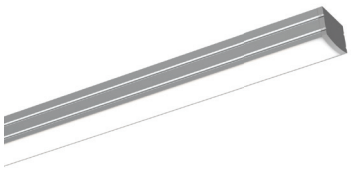



Available TivoTape Options - Indoor

DEFINE
SB
HO
LB

ELITE
SB
HO
VHO

ELITE+
Plus
Pro
Vision
Flow

COB
LB
HO

FUSE24
RGB
RGB+W
RGB+W+W
DW
Pixle24 RGB
Pixle24 RGBW

FUSE12
Pixel12 RGB

Available TivoTape Options - Outdoor

DEFINE
SB
HO

ELITE
SB
HO

ELITE+
Plus
Pro
Flow

FUSE24
RGB
RGB+W
RGB+W+W

Ordering Information

MOFT-CHAN-XXX-6.5
XXX = **SLV** (Silver)
WHT (White), **ABLK** (Anodized Black)
Aluminum Extrusion
available in 6.5′ lengths

MOFT-LNS-XXX-6.5
XXX = **OPL** (Opal), **CLR** (Clear), **DIF** (Diffused), **BLK** (Black) PC lens, sold in 6.5′

MOFT-LNS-SIL-XXX-XXX
XXX= **DIF** (Diffused), **BLK** (Black)
XXX (unit in feet) = **10, 50, 100**
Silicone lens sold in roll

MOFT-CLP-SLV
Metal clip

MOFT-EC-01
Solid End Cap

MOFT-EC-02
Powerfeed End Cap

UNIV-ADJ-MTBK
Universal Adjustable Mounting Bracket

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Photometrics (based on 30K HO ELITE)



MOFETT WITH CLEAR LENS
Lumens per foot: 364.83
Watts per foot: 4
CRI : 94.8
Peak Candela: 163

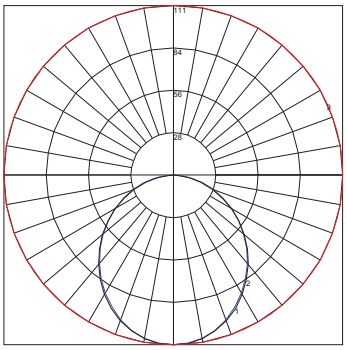

MOFETT WITH DIFFUSED LENS
Lumens per foot: 299.44
Watts per foot: 4
CRI : 95.4
Peak Candela: 111.34



MOFETT WITH OPAL LENS
Lumens per foot: 157.34
Watts per foot: 4
CRI : 97.6
Peak Candela: 53.14

Diode Visibility

Opal lens

Clear lens

Diffused lens

Silicone lens

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 06/10/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458