

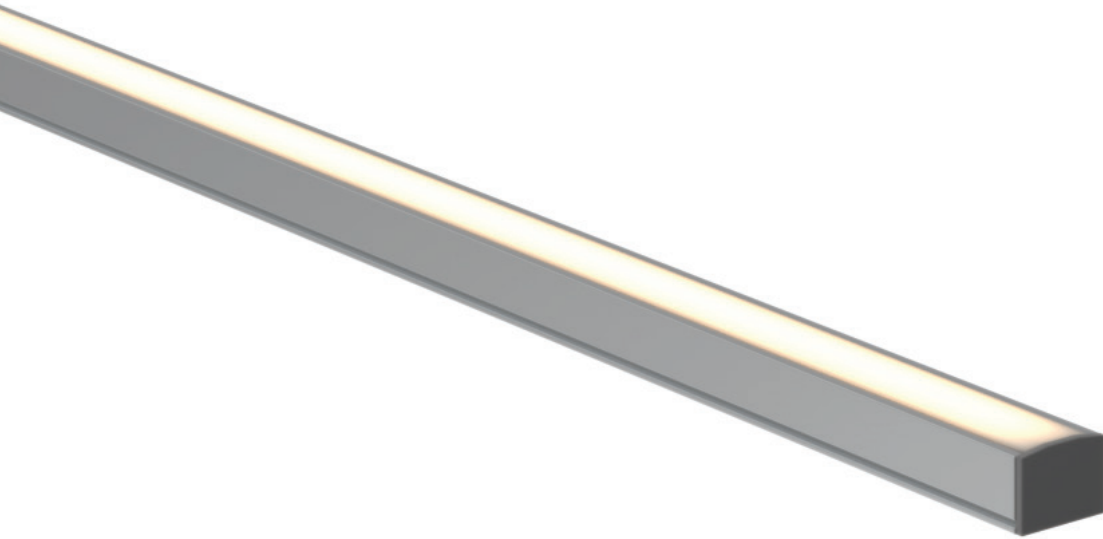


MOSHER

Design Guide

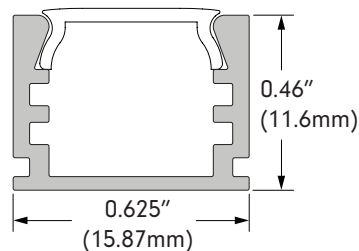

Profile & Dimensions

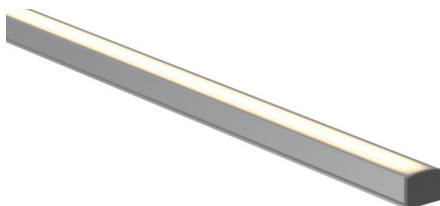

Available TivoTape Options - Indoor

DEFINE

LB
SB
HO

ELITE

SB
HO
VHO

ELITE+

Standard
Pro
Vision
Flow

FUSE24

RGB
RGBW

FUSE12

PiXEL RGB

Available TivoTape Options - Outdoor

DEFINE

SB
LB

FUSE24

RGB

FUSE12

PiXEL RGB

Ordering Information

**MOSR-CHAN-SLV-6.5**

Anodized Aluminum Extrusion,
available in 6.5' lengths

**MOSR-LNS-OPL-6.5**

Opal lens, length 6.5'

**MOSR-EC-01**

Solid End Cap

**MOSR-EC-02**

Powerfeed End Cap


**MTBK-03**

Mounting Clip

**UNIV-ADJ-MTBK**

Universal Adjustable Mounting
Bracket

Photometrics (based on 27K DW)

**MOSHER WITH 2700K DW**

Delivered Lumens per foot: 66

Watts per foot: 3.3

CRI : 98

Peak Candela: 23.4

Diode Visibility



Opal lens

