

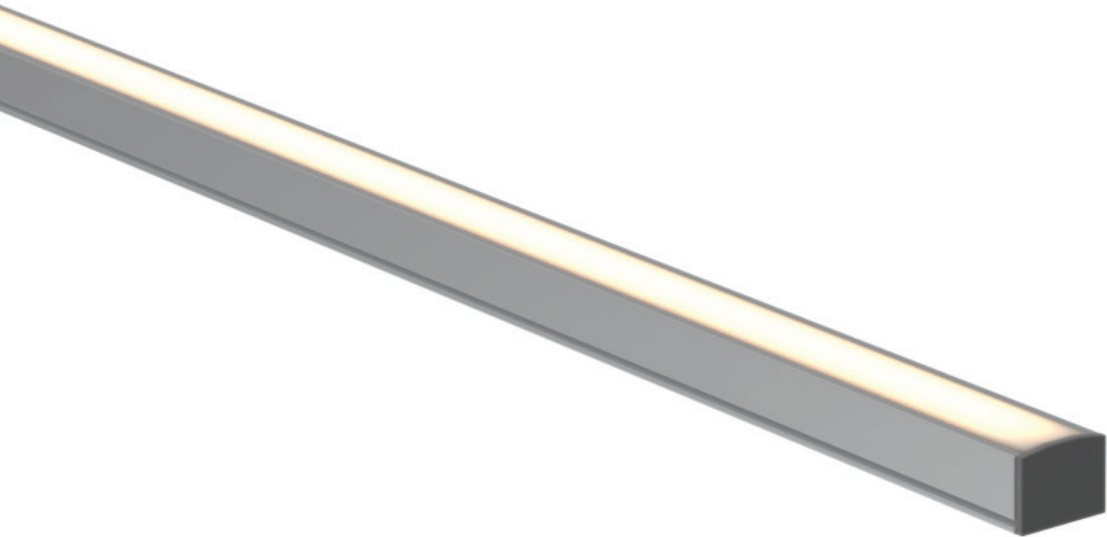


# MOSHER

Design Guide

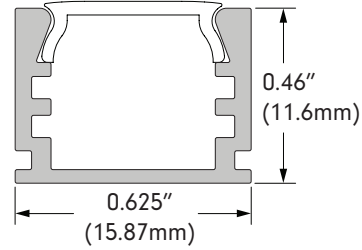

Profile & Dimensions

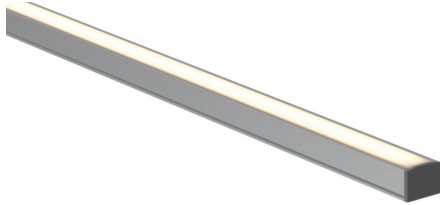

Available TivoTape Options - Indoor

**DEFINE**

LB  
SB  
HO

**ELITE**

SB  
HO  
VHO

**ELITE+**

Standard  
Pro  
Vision  
Flow

**FUSE24**

RGB  
RGBW

**FUSE12**

PiXEL RGB

Available TivoTape Options - Outdoor

**DEFINE**

SB  
LB

**FUSE24**

RGB

**FUSE12**

PiXEL RGB

Ordering Information




**MOSR-CHAN-SLV-6.5**  
Anodized Aluminum Extrusion,  
available in 6.5' lengths



**MOSR-LNS-OPL-6.5**  
Opal lens, length 6.5'



**MOSR-EC-01**  
Solid End Cap




**MOSR-EC-02**  
Powerfeed End Cap



**MTBK-03**  
Mounting Clip

Photometrics (based on 27K DW)

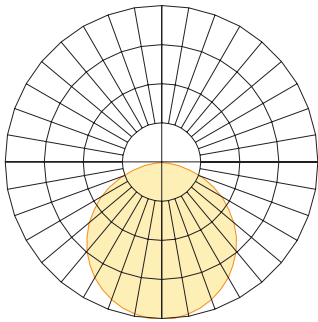

**MOSHER WITH 2700K DW**  
Delivered Lumens per foot: 66  
Watts per foot: 3.3  
CRI : 98  
Peak Candela: 23.4

Diode Visibility



Opal lens

