

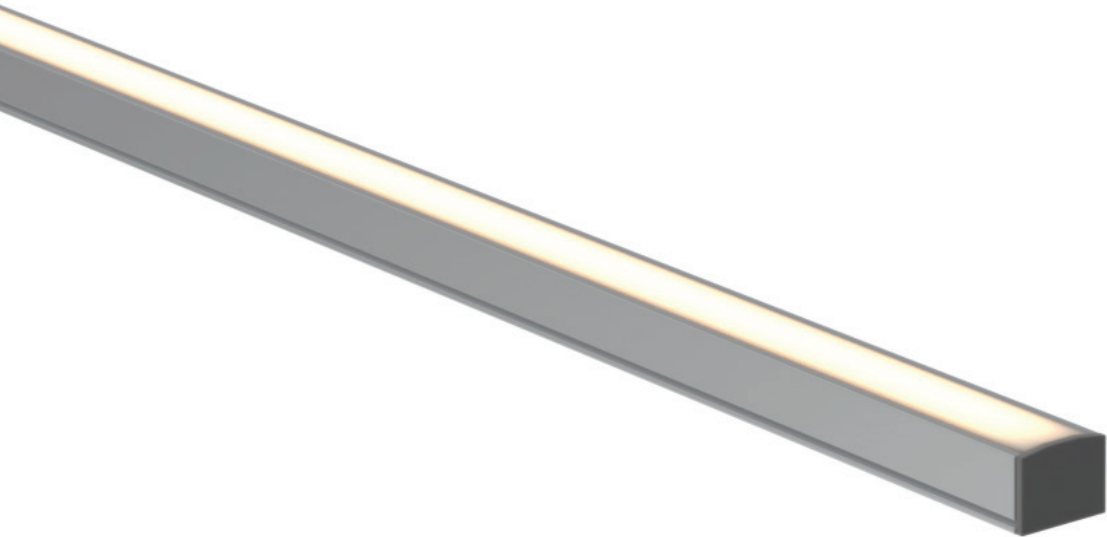


MOSHER

Design Guide

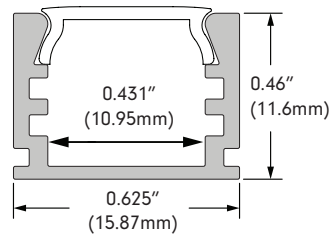

Profile & Dimensions

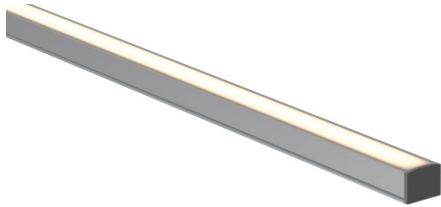

Available TivoTape Options - Indoor

DEFINE

- SB
- HO
- LB

COB

- LB
- HO


FUSE24

- RGB
- DW

FUSE12

- Pixel12 RGB

Ordering Information

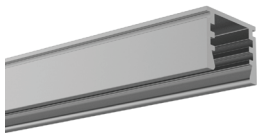

MOSR-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



MOSR-LNS-OP-6.5
Opal lens, length 6.5'



MOSR-EC-01
Solid End Cap



MOSR-EC-02
Powerfeed End Cap




MTBK-03
Mounting Clip



UNIV-ADJ-MTBK
Universal Adjustable Mounting
Bracket

Photometrics (based on 27K DW)

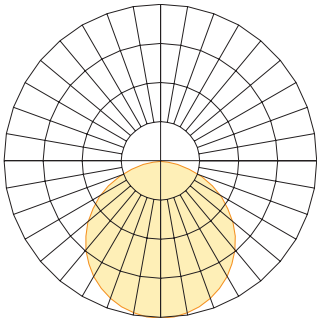

MOSHER WITH 2700K DW
Delivered Lumens per foot: 66
Watts per foot: 3.3
CRI : 98
Peak Candela: 23.4

Diode Visibility



Opal lens

