


NOYES

Design Guide



Profile & Dimensions

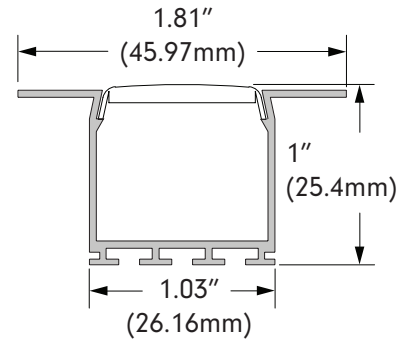

Available TivoTape Options - Indoor

DEFINE
LB
SB
HO

ELITE
SB
HO
VHO


ELITE+
Standard
Pro
Vision
Flow
DUO

FUSE24
RGB
RGBW

FUSE12
PiXEL RGB

Flex 120

Ordering Information



NOYS-CHAN-SLV-6.5
Silver Anodized Aluminum
Extrusion, 6.5' Lengths



NOYS-LNS-XXX-6.5
XXX = OPL (Opal), **CLR**
(Clear), **DIF** (Diffused)
lens, length 6.5'



NOYS-EC-01
Solid End Cap




NOYS-EC-02
Powerfeed End Cap




NOYS-SPRING-CLP
Clip, Spring, Metal


Photometrics

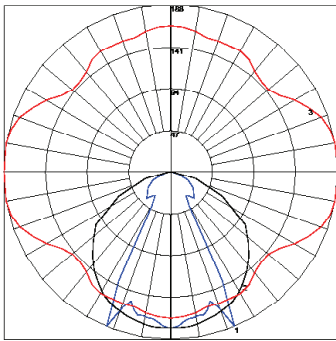

NOYES WITH CLEAR LENS
 Lumens per foot: 304.28
 Watts per foot: 4
 CRI : 94.3
 Peak Candela: 175.47

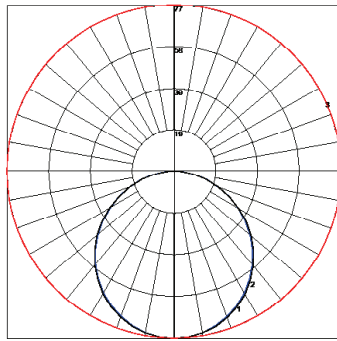


NOYES WITH DIFFUSED LENS
 Lumens per foot: 222.46
 Watts per foot: 4
 CRI : 94.9
 Peak Candela: 77.12

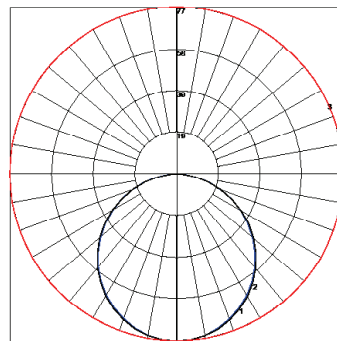

NOYES WITH OPAL LENS
 Lumens per foot: 107.10
 Watts per foot: 4
 CRI : 97.4
 Peak Candela: 77.12


Diode Visibility



Opal lens



Clear lens



Diffused lens

