

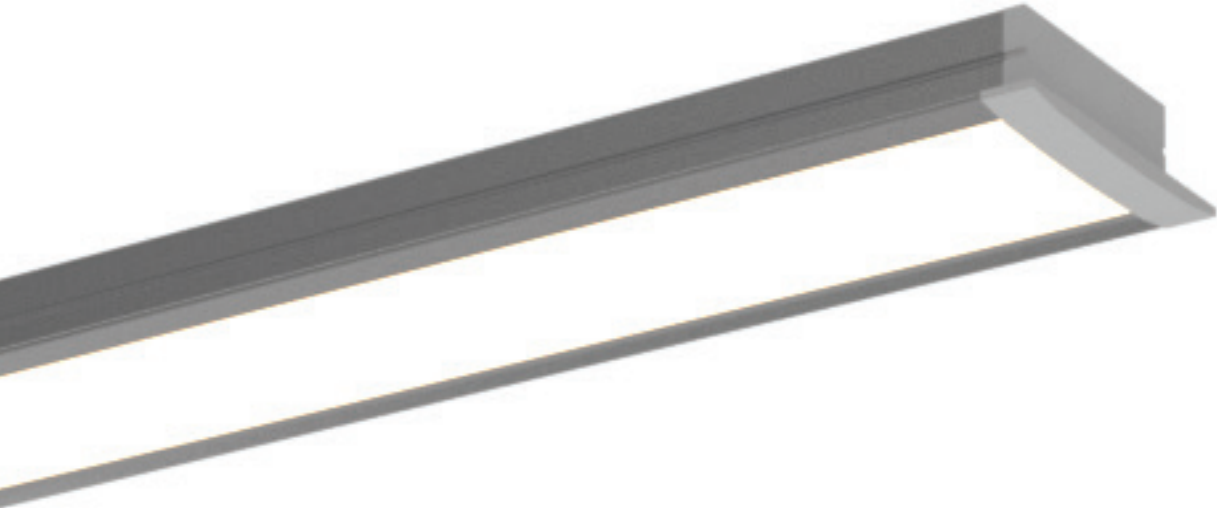


WARNER

Design Guide

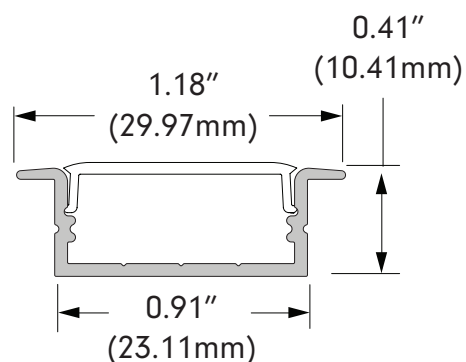

Profile & Dimensions

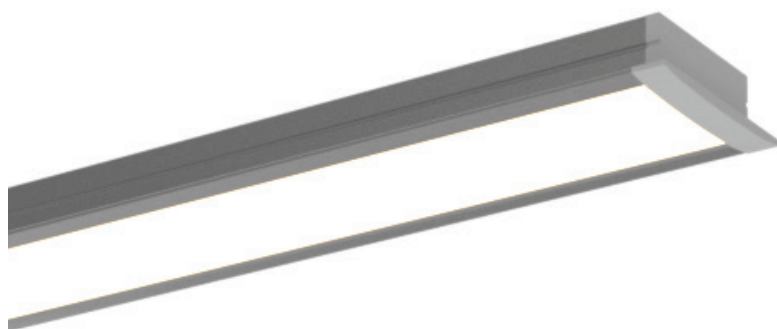

Available TivoTape Options - Indoor

DEFINE
LB
SB
HO


ELITE
SB
HO
VHO

ELITE+
Standard
Pro
Vision
Flow
DUO

FUSE24
RGB
RGBW

FUSE12
PiXEL RGB

Ordering Information



WRNR-CHAN-SLV-6.5
Silver Anodized Aluminum
Extrusion, 6.5' Lengths




WRNR-LNS-OP-6.5
Opal lens, length 6.5'



WRNR-EC-01
Solid End Cap




WRNR-EC-02
Powerfeed End Cap



WRNR-MTBK
Mounting Clip

Photometrics

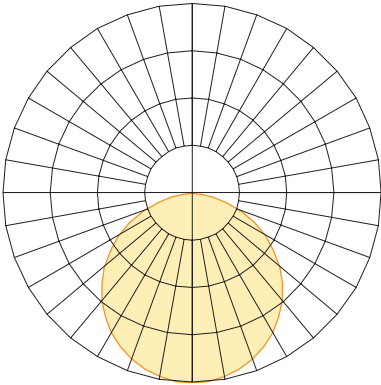

WARNER WITH 2700K XS
Delivered Lumens per foot: 102
Watts per foot: 3.3
CRI : 98
Peak Candela: 35.4

Diode Visibility



Opal lens

