

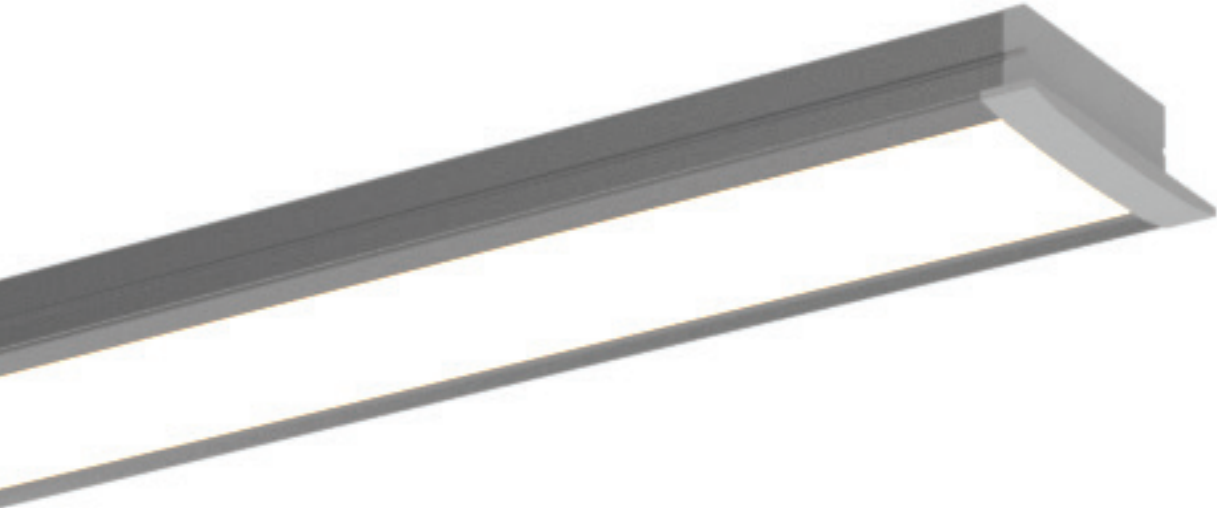


WARNER

Design Guide

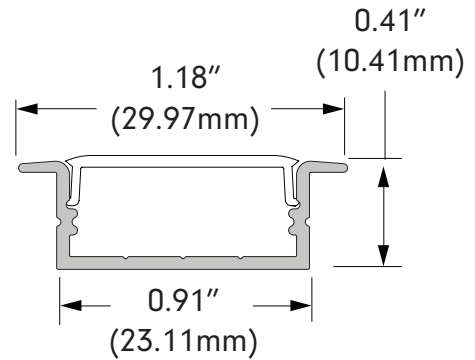

Profile & Dimensions

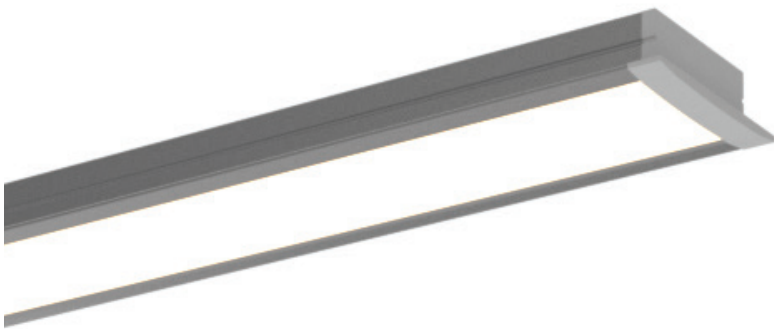

Available TivoTape Options - Indoor

DEFINE
SB
HO
LB

ELITE
SB
HO
VHO

ELITE+
Plus
Pro
Vision
Flow

COB
LB
HO

FUSE24
RGB
RGB+W
RGB+W+W
DW
Pixle24 RGB
Pixle24 RGBW

FUSE12
Pixel12 RGB

Available TivoTape Options - Outdoor


DEFINE
SB
HO

ELITE
SB
HO

ELITE+
Plus
Pro
Flow

FUSE24
RGB
RGB+W
RGB+W+W

Ordering Information



WRNR-CHAN-SLV-6.5
Silver Anodized Aluminum
Extrusion, 6.5' Lengths



WRNR-LNS-OP-6.5
Opal lens, length 6.5'




WRNR-EC-01
Solid End Cap




WRNR-EC-02
Powerfeed End Cap

Ordering Information



WRNR-MTBK
Mounting Clip

Photometrics

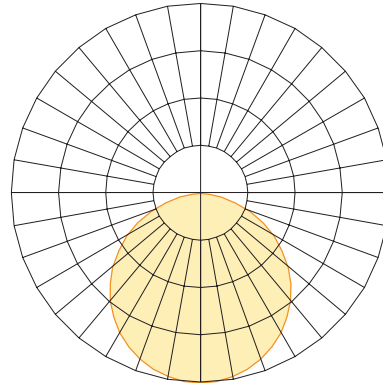

WARNER WITH 2700K XS
Delivered Lumens per foot: 102
Watts per foot: 3.3
CRI : 98
Peak Candela: 35.4

Diode Visibility



Opal lens

