


tivoli



FlexileSM

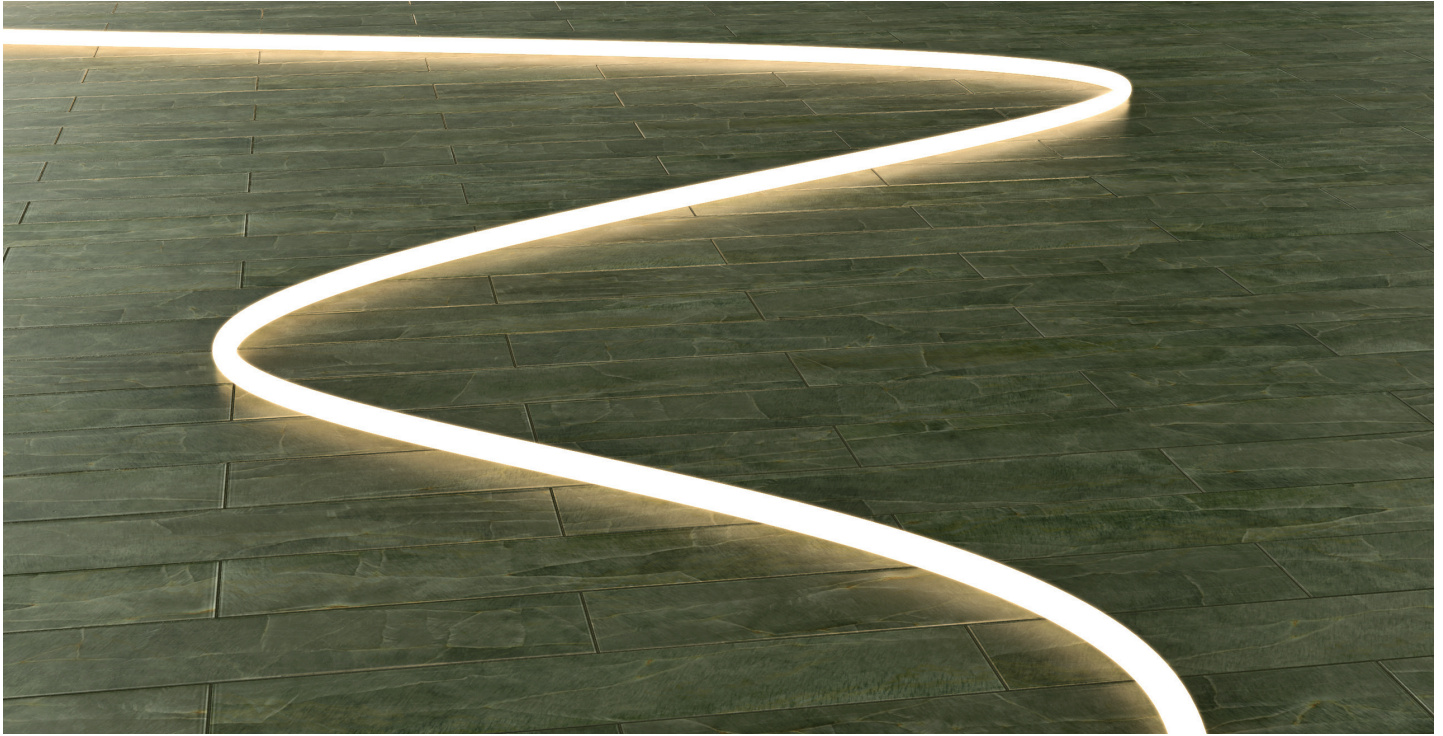


Project: _____ Type: _____

- Compare to traditional neon 360° lighted surface illuminates uniformly without any shadowing
- High luminous efficiency with LM80 report
- Easily bend to any shape with superior flexibility
- UV Stabilized with food-grade environmental silicone housing (no yellowing or cracking)
- Resistance to saline solutions, acids, alkali, and corrosive gases
- Low Voltage 24V DC


Dimensions



Front Power Lead



Side Power Lead



Order Specification Guide

PRODUCT CODE	PROFILE	POWER LEAD DIRECTION	LED COLOR	LENGTH	VOLTAGE
FLX	SM	F	23	024	24
FLX = Flexile 360° Light	SM = Small	F = Front S = Side	23 = 2300K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	024 = 2' 048 = 4' 096 = 8' 195 = 16.25'	24 = 24V DC

For custom cut lengths consult factory for lead time and MOQ

Extra Lead Prep

FLX-XEP



Extra lead wire for extended length.
Sold per ft.

Specifications

LED Intensity	2300K	2700K	3000K	3500K	4000K
Lumens (lm/ft)	285	295	310	N/A	321
Beam Angle	360°				
Efficacy (lm/W)	63.3	65.5	68.8	N/A	71
CRI	95	95	95	95	95
Electrical					
Dimming	TRIAC, ELV, MLV, 0-10V, DMX				
Input Voltage	24V DC				
Power Consumption (W/ft)	4.5				
Maximum Electrical Run	20'				
Maximum Mechanical Run	16.25'				
Physical					
Dimensions (DIA)	0.71"				
Cut Increments	1"				
Bend Radius	2.50"				
Material	Flame, UV, Solvent, Saltwater Resistant Silicone				
Storage Temperature	-0°C / -32°F ~ 60°C / 140°F				
Working Temperature	-30°C / -86°F ~ 55° / 131°F				
Certification and Testing					
Certification	cULus, CE, RoHS, IK08				
Environment	Dry Location				
Rated Hours (TM80)	70000 hrs.				
Warranty	3 Years				

Photometrics

Note: Data is based on 3000K

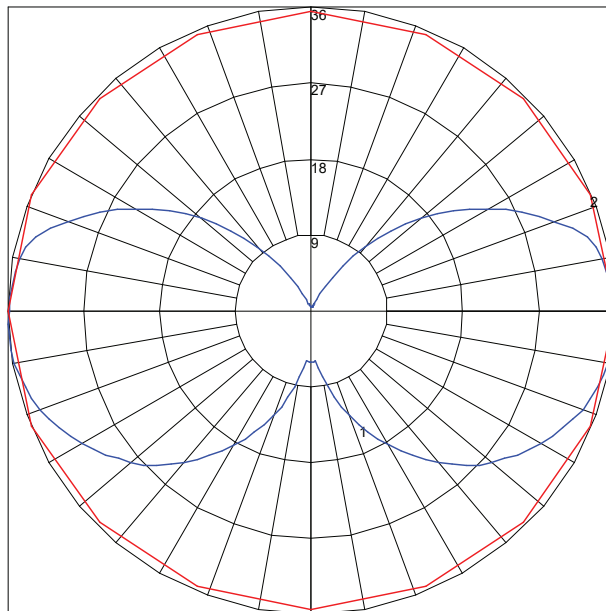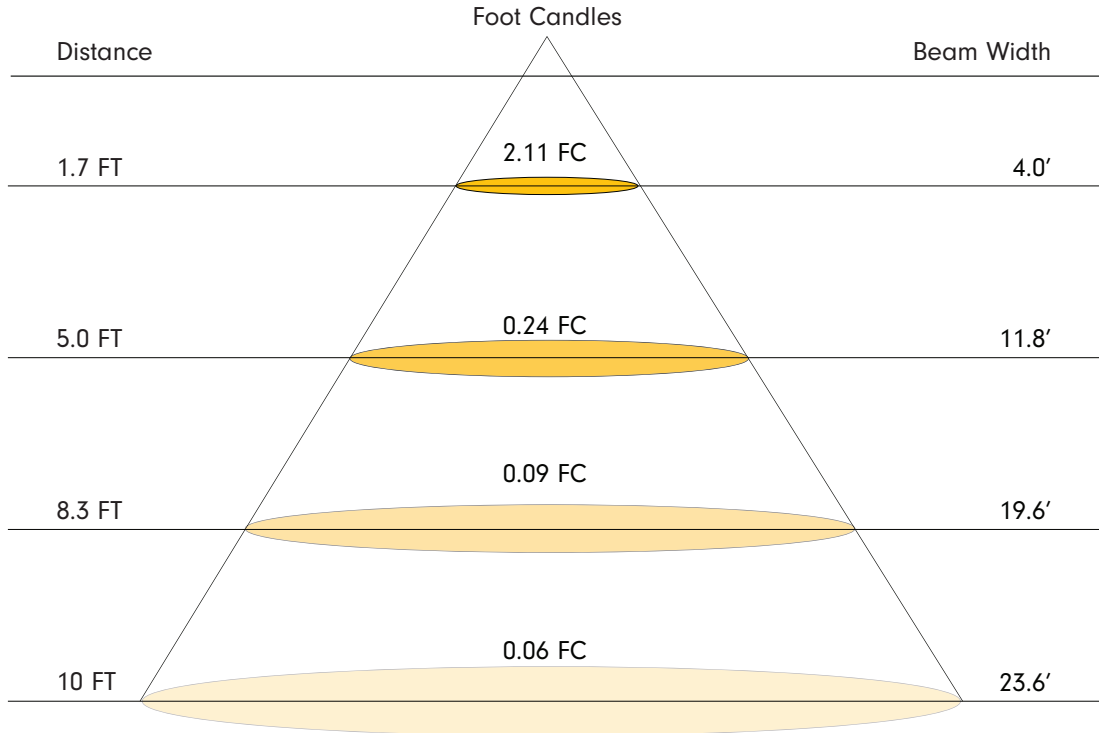

Maximum Candela = 35.9 Located At Horizontal Angle = 0, Vertical Angle = 85
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (85) (Through Max. Cd.)

Mounting Options




FLX-SM-CL-CLIP

PC clip closed 1
Mount spacing 15"
Bend diameter 2.5"
sold each




FLX-SM-CL-CHAN

PC channel closed 6.5
Bend diameter 2.5"
sold each



FLX-SM-OP-CLIP

PC clip open 2.36"
Mounting spacing 15"
Bend diameter 3"
*sold each



FLX-SM-OP-CHAN

PC channel open 6.5'
Bend diameter 3"
*sold each

*Not for horizontal overhead application



Power Supplies - Indoor & Outdoor Cont.

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MIN LOAD	MAX LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	3W	30W	1.3A
	INF-J-60-1-2.5-24				1	6W	60W	2.5A
	INF-J-96-1-4-24				1	9W	96W	4A
	INF-J-192-2-4-24				2	2x9W	2x96W	2x4A
	INF-J-288-3-4-24				3	3X9W	3x96W	3x4A

Power Supplies - Indoor Only

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC 50/60 HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Single Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Multi Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A