tivoli
FlexileSM

Project: _____ Type: _____

- Compare to traditional neon 360° lighted surface illuminates uniformly without any shadowing
- High luminous efficiency with LM80 report
- Easily bend to any shape with superior flexibility
- UV Stabilized with food-grade environmental silicone housing (no yellowing or cracking)
- Resistance to saline solutions, acids, alkali, and corrosive gases
- Low Voltage 24V DC

Dimensions

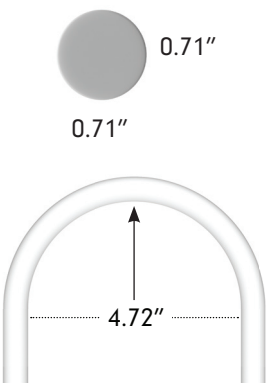

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Order Specification Guide

PRODUCT CODE	PROFILE	POWER LEAD DIRECTION	LED COLOR	LENGTH	VOLTAGE
FLX	**SM**				**24**
FLX = Flexile 360° Light	**SM** = Small	**F** = Front **S** = Side	**23** = 2300K **27** = 2700K **30** = 3000K **35** = 3500K **40** = 4000K	**024** = 2′ (24″) **048** = 4′ (48″) **096** = 8′ (96″) **195** = 16.25′ (195″)	**24** = 24V DC
			RD = Red **GR** = Green **BL** = Blue **AM** = Amber	**024** = 2′ (23″) **048** = 4′ (48″) **096** = 8′ (96″) **195** = 16.25′ (194″)	

For custom cut lengths consult factory for lead time and MOQ

Extra Lead Prep

FLX-XEP
Extra lead wire for extended length.
Sold per ft.

Specifications

LED CCT	2300K	2700K	3000K	3500K	4000K
Lumens (lm/ft)	285	295	310	N/A	321
Efficacy (lm/W)	63.3	65.5	68.8	N/A	71
CRI	95				
Power Consumption (W/ft)	4.5				
Maximum Electrical Run	20′				
Maximum Mechanical Run	16.25′				
Cut Increments	1″				

LED Color	Red	Green	Blue	Amber
Lumens (lm/ft)	CF	CF	CF	CF
Efficacy (lm/W)	N/A	N/A	N/A	N/A
Power Consumption (W/ft)	3.12			
Maximum Electrical Run	20′			
Maximum Mechanical Run	16.25′			
Cut Increments	1.64″			

Electrical	
Dimming	TRIAC, ELV, MLV, 0-10V, DMX
Input Voltage	24V DC
Physical	
Beam Angle	360°
Dimensions (DIA) Flexile	0.71″
Bend Diameter	9.44″
Material (Flexile)	Flame, UV, Solvent, Saltwater Resistant Silicone
Storage Temperature	-0°C / -32°F ~ 60°C / 140°F
Working Temperature	-20°C / -68°F ~ 55°C / 131°F
Certification and Testing	
Certification	cULus, CE, RoHS, IK08
Environment	Dry Location
Rated Hours (TM80)	70000 hrs.
Warranty	5 Years

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 07/07/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Photometrics

Note: Data is based on 3000K

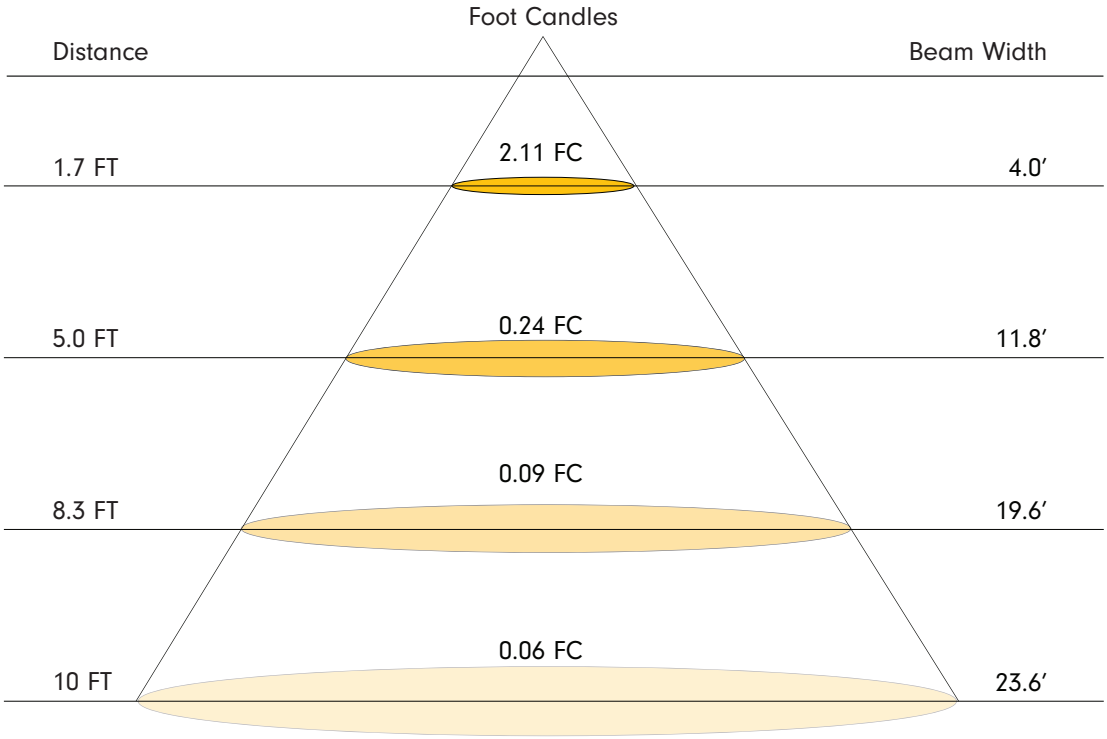

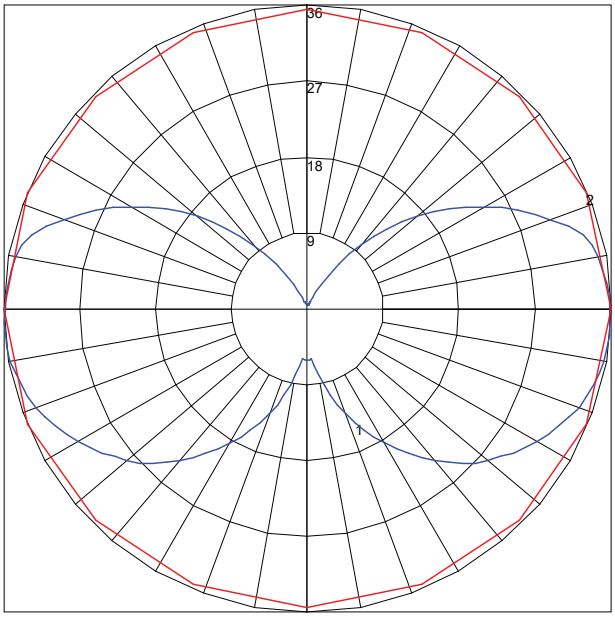

Maximum Candela = 35.9 Located At Horizontal Angle = 0, Vertical Angle = 85
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (85) (Through Max. Cd.)

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Copyright © Tivoli 07/07/26

www.tivolilighting.com tel: 714-957-6101 fax: 714-427-3458

Mounting Options

FLX-SM-CL-CLIP
PC clip closed 1
Mount spacing 15”
sold each

FLX-SM-CL-CHAN
PC channel closed 6.5
sold each

FLX-SM-OP-CLIP
PC clip open 2.36”
Mounting spacing 15”
*sold each



FLX-SM-OP-CHAN
PC channel open 6.5’
*sold each

FLX-SM-PUK-XX-XX
XX = **4.5** (4.5”), **6.0** (5.9”), **7.0** (6.9”)
XX = **BK** (black), **WH** (white)
twist-to-close feature fits SM Flexile with multiple diameters.
2 power feed holes

FLX-SM-NODE-X-XX
X = **1** (1 stack), **2** (2 stack)
XX = **BK** (black), **WH** (white)
twist-to-close feature fits SM Flexile, with 1 power feed hole

*Not for horizontal overhead application

Tivoli, LLC. reserves the right to modify this specification without prior notice.

Power Supplies - Indoor & Outdoor Cont.

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MIN LOAD	MAX LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-1.3-24	Indoor / Outdoor	100 - 277V AC	24V DC	1	3W	30W	1.3A
	INF-J-60-1-2.5-24				1	6W	60W	2.5A
	INF-J-96-1-4-24				1	9W	96W	4A
	INF-J-192-2-4-24				2	2x9W	2x96W	2x4A
	INF-J-288-3-4-24				3	3X9W	3x96W	3x4A

Power Supplies - Indoor Only

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-D	Indoor / Damp	100-277V AC ⁵⁰⁄₆₀ HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-D				2	2x96W	2x4A
	ADUL-320-3-4-24-D				3	3x96W	3x4A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DOT	Indoor / Damp	100-277V AC ⁵⁰⁄₆₀ HZ	24V DC	1	96W	4A
	ADUL-240-2-4-24-DOT				2	2x96W	2x4A
	ADUL-320-3-4-24-DOT				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Single Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-120-1-4-24-DIN	Indoor / Damp	100-277V AC 50⁄60 Hz	24V DC	1	96W	4A
	ADUL-240-2-4-24-DIN				2	2x96W	2x4A
	ADUL-320-3-4-24-DIN				3	3x96W	3x4A

ADUL - DMX SUB CONTROLLER (Multi Address)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-240-2-4-24-DIN-2	Indoor / Damp	100-277V AC 50⁄60 Hz	24V DC	2	2x96W	2x4A
	ADUL-320-3-4-24-DIN-3				3	3x96W	3x4A

Tivoli, LLC. reserves the right to modify this specification without prior notice.