

# LITESPHERE 2.0




tivoli®




Project: \_\_\_\_\_ TYPE: \_\_\_\_\_

- Tivoli's next evolution of Litesphere delivers a robust specification-grade strand with factory molded standard spacing for consistent quality from start to finish
- Litesphere 2.0 design provides optional suspended mounting or a twist-off cap for surface applications
- Available DarkSky option with added light shade
- 12V DC Low voltage system for long runs
- IP67
- cULus
- 3 Year warranty

## Dimensions

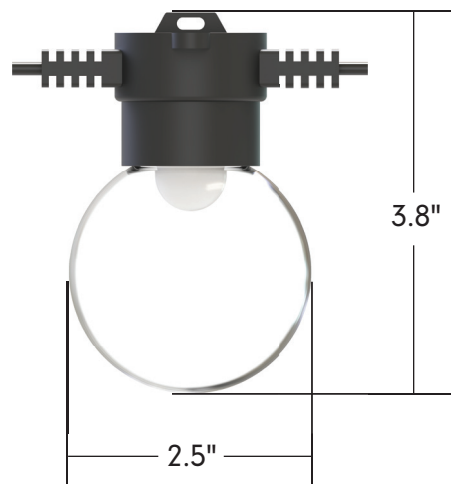

System Configuration Example

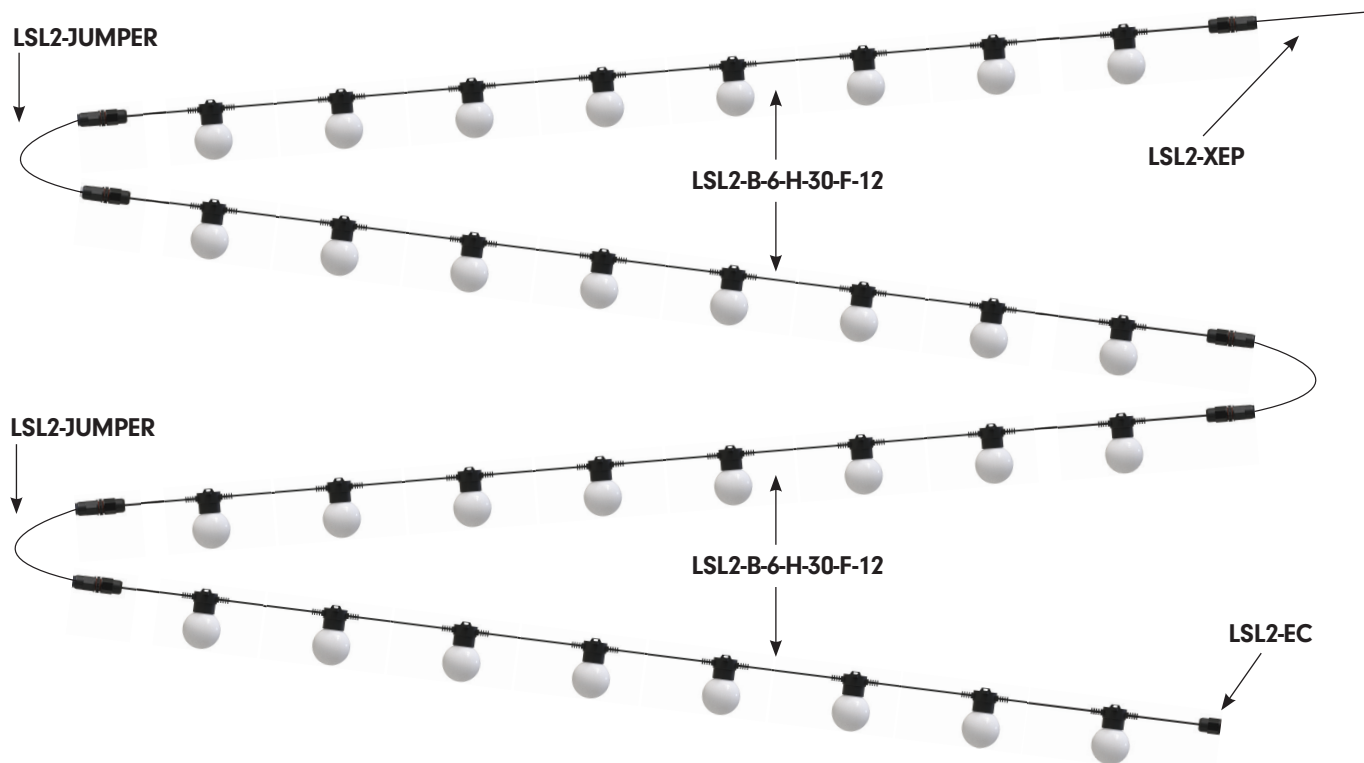

Strand Order Guide

**Note:** For suspension application, a catenary cable is required for proper installation. Please contact Tivoli for recommendations on unique mounting applications.

Product	Wire	Spacing	LED Type	LED Color	Globe	Voltage
LSL2						
Litesphere 2.0	<b>B</b> Black	<b>06</b> 6" OC	<b>V</b> Very High Output	<b>19</b> 1900K	<b>C</b> Clear	<b>12</b> 12V DC
	<b>W</b> White	<b>12</b> 12" OC	<b>H</b> High Output	<b>27</b> 2700K	<b>F</b> Frosted	
		<b>18</b> 18" OC	<b>S</b> Standard Output	<b>30</b> 3000K	<b>O</b> Opal	
		<b>24</b> 24" OC		<b>35</b> 3500K	<b>R</b> Red	
		<b>36</b> 36" OC		<b>40</b> 4000K	<b>N</b> Orange	
		<b>48</b> 48" OC		<b>50</b> 5000K*	<b>Y</b> Yellow	
				<b>AM</b> Amber*	<b>G</b> Green	
				<b>RB</b> Royal Blue*	<b>B</b> Blue	
				<b>RD</b> Red*	<b>P</b> Purple	
				<b>GN</b> Green*	<b>Z</b> Varried Colors	
				<b>YL</b> Yellow*		
				<b>TS</b> Turtle Safe*		

\*Available in VHO LED only




**Power Lead Order Guide**

Figure A - All Litesphere 2.0 are evenly cut between globes according to specified spacing.  
 Figure B - Power leads are added to the end cut, extending the total length of the power lead.


**LSL2-XEP-X-XX**

X = B (Black), W (White)  
 XX = 05 (5'), 10 (10'), 15 (15'), 20 (20'), 25 (25')  
 For custom length consult factory

**Figure A**

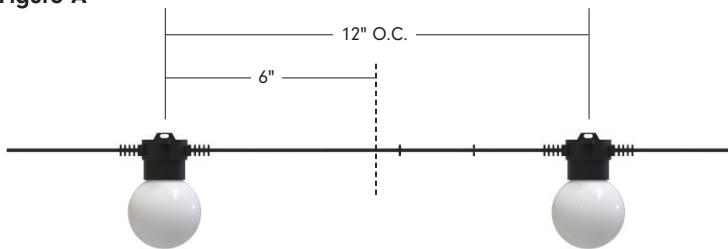

**Figure B**

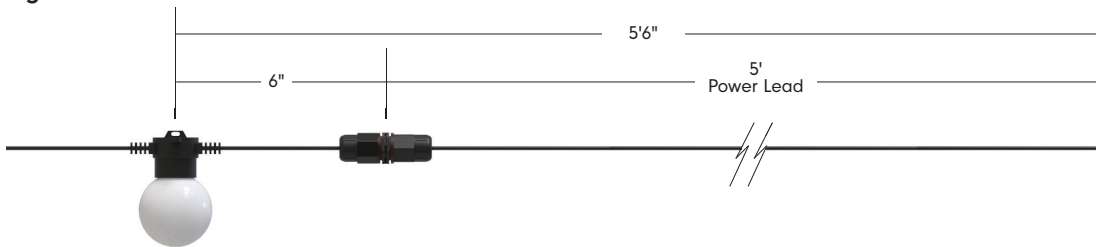


**Jumper Order Guide**


**LSL2-JUMPER-X-XX**

X = B (Black), W (White)  
 XX = 05 (5'), 10 (10')  
 For custom length, consult factory

**Figure A**

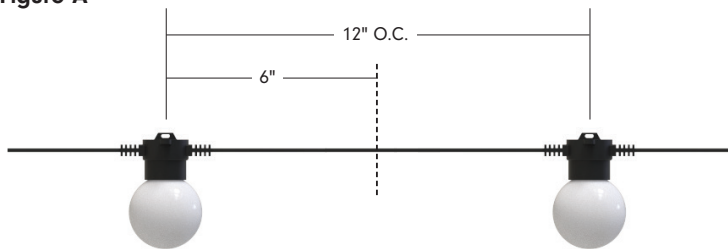

**Figure B**

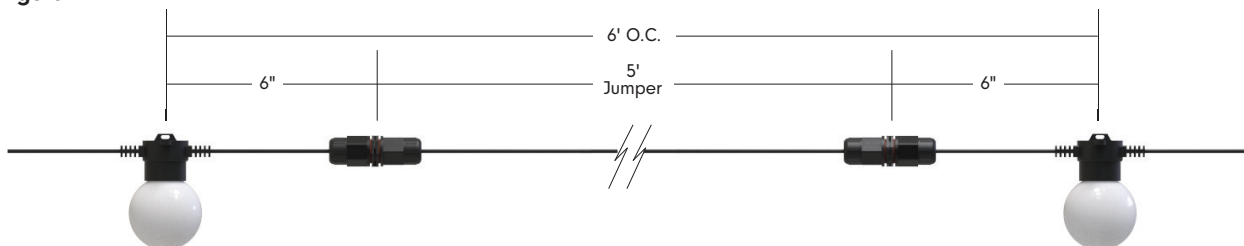

## Specifications

Output - Standard Brightness	6"	12"	18"	24"	36"	48"
Lumens/ft	11	6	4	3	2	N/A
Watts/ft	0.17	0.09	0.06	0.04	0.03	0.02
Maximun Electrical Run	130'	180'	230'	250'	275'	275'

Output - High Output	6"	12"	18"	24"	36"	48"
Lumens/ft	29.9	15	10	7	5	N/A
Watts/ft	0.46	0.23	0.15	0.12	0.08	0.05
Maximun Electrical Run	80'	110'	130'	150'	175'	200'

Output - Very High Output	6"	12"	18"	24"	36"	48"
Lumens/ft	180	90.2	60	45	30	N/A
Watts/ft	1.92	0.96	0.64	0.48	0.32	0.24
Maximun Electrical Run	30'	55'	70'	80'	90	100'

Output - Based on 3000K Clear Globe	
Efficacy	Standard Brightness (40), High Output (46), Very High Output (94)
Electrical	
Input Voltage	12V DC
Power Consumption (W/LED)	Standard Brightness (.09), High Output (.23), Very High Output (.96)
Control	
Control System	0-10V, ELV, MLV, DMX 512 (Dim to 1% with an Infinity power supply and a 0-10V Lutron Diva dimmer)
Physical	
Dimensions	2.5"W x 3.8"H
Socket Housing	PVC
American Wire Gauge	14 AWG
Globe	PE
Mounting	Surface Mount, Suspended
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Certification and Testing	
Certification	cULus
Environment	Wet Location
Lumen Maintenance (L70) Hours	70,000
IP Rating	IP67
Warranty	3 Years

## Specifications

EPA	6"	12"	18"	24"
Standard	0.10	0.06	0.05	0.04
Hat 8"	N/A	0.53	0.37	0.28
Hat 13"	N/A	N/A	0.93	0.71
Dish 10"	N/A	0.82	0.55	0.42
Flower 10"	N/A	0.82	0.55	0.42
Flower 13"	N/A	N/A	0.93	0.71

Weights	6"	12"	18"	24"	36"	48"
lb/ft	0.33	0.28	0.24	0.20	0.17	0.13
lb/ft with catenary cable	0.35	0.30	0.26	0.22	0.19	0.15

## Mounting Options

### SURFACE/FLUSH

For surface mount applications, remove the top suspension-plate by turning counter-clockwise until off. Place socket flush against the desired surface and mount using proper screws according to substrate.



### SUSPENDED

Suspended mounting will use a combination of LS-Cable, LS-Locks with LS-UVZP. Tension the cable wire with our LS-TT (Tension Tool) for desired sag (Please adhere to local city code for suspended application).

**Note:** For suspension application, a catenary cable is required for proper installation. Please contact Tivoli for recommendations on unique mounting applications.



## Mounting Accessories



### LS-CABLE-X

**X = 60 (60'), 110 (110'), 500 (500')**  
1/8" Stainless steel cable includes (2) cable locks for use with loads up to 200lbs  
Note: 500' no locks included



### LS-LOCK-X

**X = 2 (2 pcs), 4 (4 pcs)**  
Includes (1) release key  
Cable Lock for 1/8" cable, support loads up to 200 lbs.



### LS-TT

Cable tensioning tool up to 880lbs with 6:1 gear drive with integral torque gauge controls




### LS-UVZP-BK-XX

**XX = 30 (30 pcs), 50 (50 pcs)**  
Black UV resistant, heavy duty ties maximum weight up to 100 lbs./per tie


### Light Shade Accessories




**SHADE-HT-BK-XX-XX**  
**XX = BK** (black), **CO\*** (copper)  
**XX = 8** (8.3"), **13\*\*** (12.6")  
 Black top, black/copper bottom  
 Weight: 0.46 lb (10), 1.2 lb (13)



**SHADE-DS-BK-BK-10**  
 10.2"  
 Black top, black bottom  
 Weight: 0.76 lb



**SHADE-FL-BK-BK-XX**  
**XX = 10** (9.8"), **13** (13.8")  
 Black top, black bottom  
 Weight: 0.63 lb (10), 1.48 lb (13)

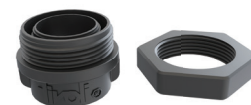

**SHADE-ADP-LSL2-XX-XX**  
**XX = BK** (Black), **WH** (White)  
**XX = 01** (1 pc), **25** (25 pcs),  
**50** (pcs)  
 PVC shade adapters black

\*Only available for 13 (Hat)    \*\*Consult factory for lead time and MOQ

### Replacement Parts



**LSL-XX-V-12**  
**XX = 19, 27, 30, 35, 40, 50,**  
**AM, RD, RB, GR, YL, TS**  
 12V VHO Wedge Base LED  
 Sold each



**LSL-XX-X-12**  
**XX = 19, 27, 30, 35, 40**  
**X = S** (standard), **H** (high  
 output)  
 12V Wedge base



**LST-XX**  
**XX = CG** (Clear Globe), **FG**  
 (Frosted Globe), **OG** (Opal  
 Globe), **OR** (Orange Globe),  
**YG** (Yellow Globe), **GG** (Green  
 Globe), **BG** (Blue Globe), **PG**  
 (Purple Globe)



**LSL2-EC-X**  
**X = B** (black), **W** (white)  
 Litesphere 2.0 End-Cap  
 Weight: 0.0375 lb  
 sold each

### In-Wall Controls



**TVOQ-1-WH**  
 White



**TVOQ-10-XX-7**  
**XX = BK** (Black), **WH** (White)



**TVOQ-2-BK**  
 Black

Photometrics

Note: Based on 3000K

Standard Brightness


High Output

Very High Output

Opal Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
0.5	0	7.5	

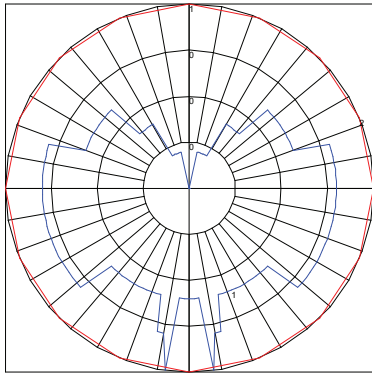

Maximum Candela = .5 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
1	0	50	

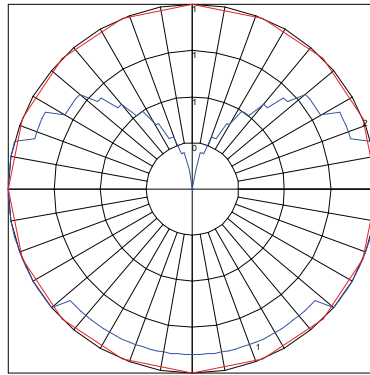

Maximum Candela = 1 Located At Horizontal Angle = 0, Vertical Angle = 50  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (50) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
5.9	0	77.5	

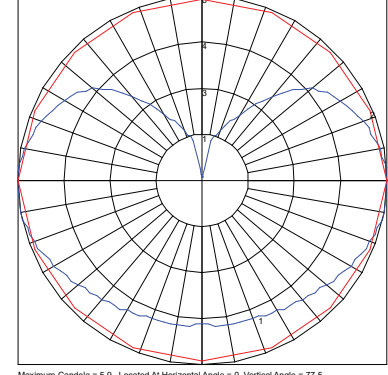


Maximum Candela = 5.9 Located At Horizontal Angle = 0, Vertical Angle = 77.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (77.5) (Through Max. Cd.)

Clear Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
2.3	0	10	

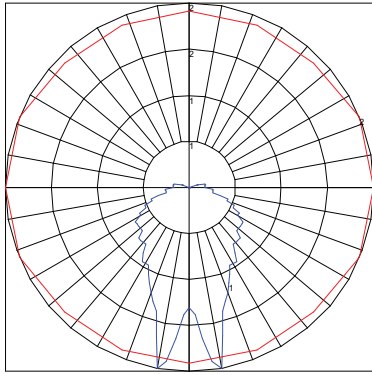

Maximum Candela = 2.3 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
6.1	0	10	

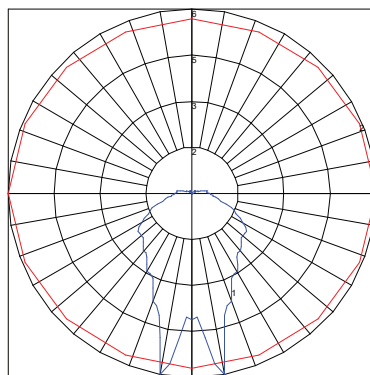

Maximum Candela = 6.1 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
25.3	0	22.5	

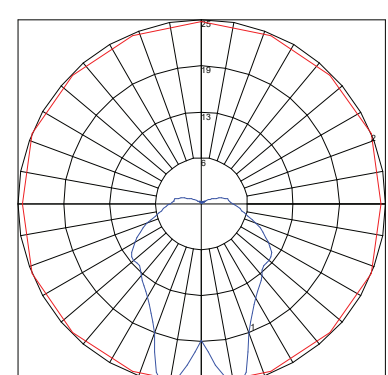


Maximum Candela = 25.3 Located At Horizontal Angle = 22.5, Vertical Angle = 12.5  
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (12.5) (Through Max. Cd.)

Frosted Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
1.6	0	7.5	

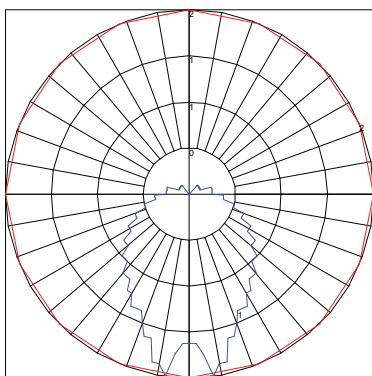

Maximum Candela = 1.6 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
4	0	10	

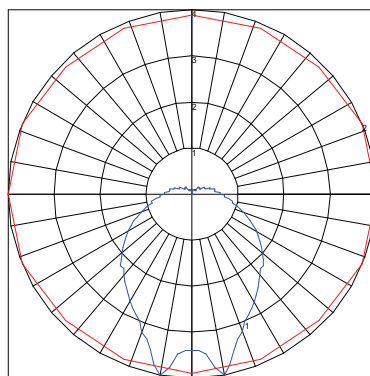

Maximum Candela = 4 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
18.5	0	7.5	

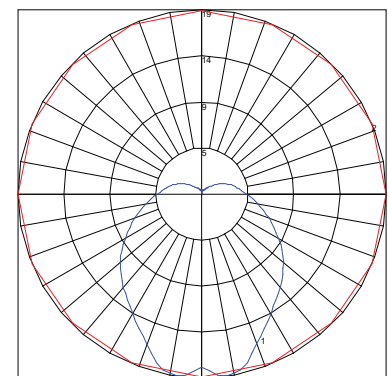

Maximum Candela = 18.5 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)



**Power Supplies**

**ADNM - NON DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-D	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-D				1	60W	5A
	ADNM-150-2-5-12-D				2	2x60W	2x5A
	ADNM-240-3-5-12-D				3	3x60W	3x5A
	ADNM-320-4-5-12-D				4	4x60W	4x5A

**ADNM - 0-10V DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DOT				1	60W	5A
	ADNM-150-2-5-12-DOT				2	2x60W	2x5A
	ADNM-240-3-5-12-DOT				3	3x60W	3x5A
	ADNM-320-4-5-12-DOT				4	4x60W	4x5A

**ADNM - DMX SINGLE ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DIN	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DIN				1	60W	5A
	ADNM-150-2-5-12-DIN				2	2x60W	2x5A
	ADNM-240-3-5-12-DIN				3	3x60W	3x5A
	ADNM-320-4-5-12-DIN				4	4x60W	4x5A

**ADNM - DMX MULTI ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	12V DC	2	2x60W	5A
	ADNM-240-3-5-12-din-3				3	3x60W	3x5A

**INFINITY - MLV / ELV / 0-10V / PWM / TRIAC**

Dim to 1% with a 0-10V Lutron Diva dimmer (by others)

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2-5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A