
Fabriano Urban Extrusion Installation Instruction

Warnings and Safety

- Please verify the contents of the package!
- Please read instructions before starting the installation.
- Make sure the power is off before installing or modifying the system.
- Call Tivoli LLC tech support with any questions.
- This product is designed to work with listed Class 2, 24V DC transformers only. Use of any other power source will cause damage, shorten the life of the fixture, and will void the warranty.
- Consult any local and national codes for installation.
- Follow basic safety precautions when dealing with any luminaire application to reduce the risk of fire, electrical shock, and/or personal injuries. This lighting system should be installed by a certified professional.

- **Do not** use this product for other than its intended use.
- **Do not** install this lighting system where the exposed bare contacts can be shorted or contact any conductive material to reduce the risk of fire and burns.
- **Do not** use any luminaire if damaged, such as a broken globe, loose connections, or frayed wire insulation. Inspect periodically.
- **Do not** secure any luminaire with staples, nails or like means that might damage the wire insulation.
- **Do not** cover lamps with cloth, paper or any material that is not part of the product.

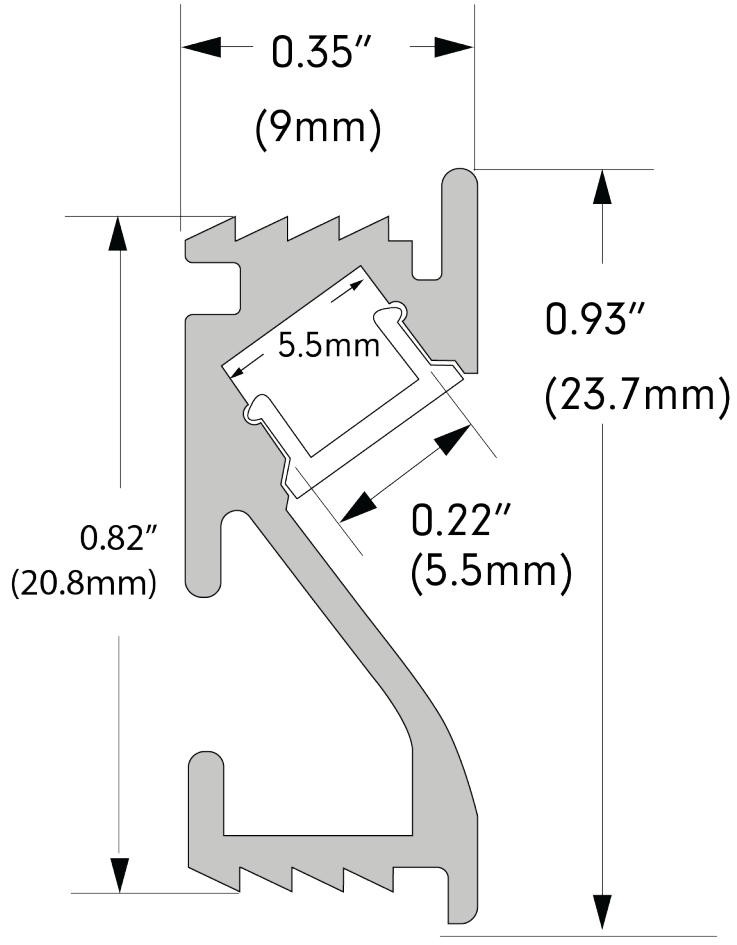


Copyright © 2023 Tivoli

Fabriano Urban Extrusion Installation Instruction


1. Refer to the specification sheet for different extrusion options.

NOTE: The images below are only for reference and the extrusion, lens, and end caps will vary by order.


2. Measure and cut the extrusion to the desired length (keeping in mind cut increment of LED tape).
3. Add endcaps to housing.

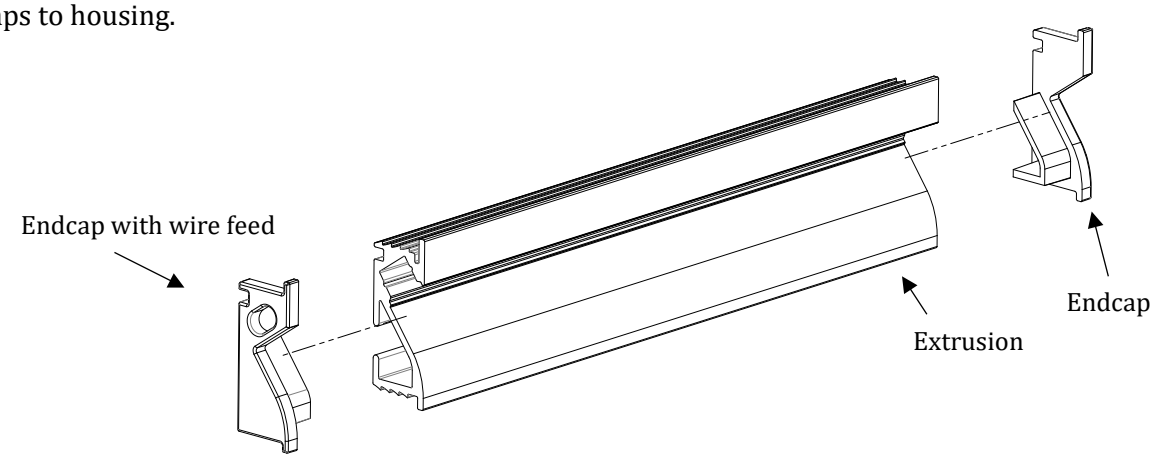

4. Ensure the extrusion surface of LED channel is smooth, clean, and free from dirt, oil, and debris.
5. Feed LED power leads through endcap with wire feed hole.
6. Peel off the adhesive backing from LED tape and apply to the mounting surface.

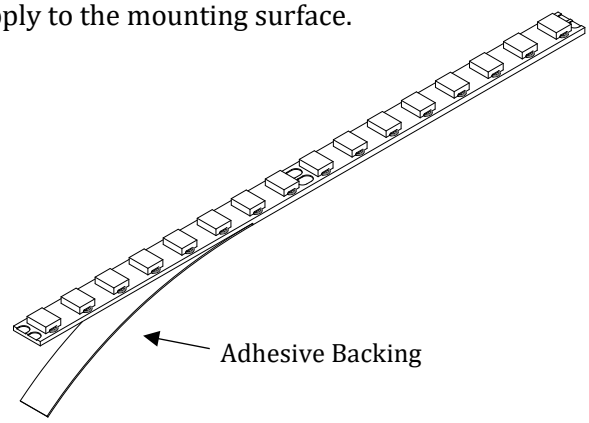


7. Press firmly along the length of the tape to ensure strong adhesion to the mounting surface.
   NOTE: Do not attempt to remove the tape after it has adhered to the surface. In the event of an incorrect application, remove the tape, clean the mounting surface, and reapply with a new piece of tape.

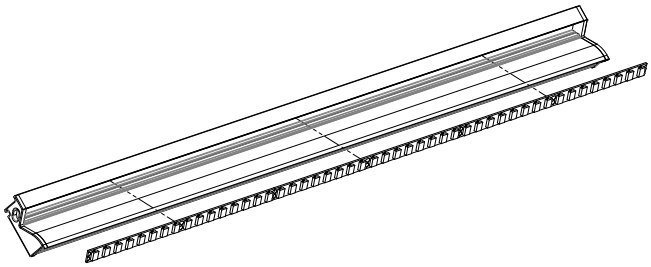


Copyright © 2023 Tivoli


Fabriano Urban Extrusion Installation Instruction

8. Install extrusion lens.

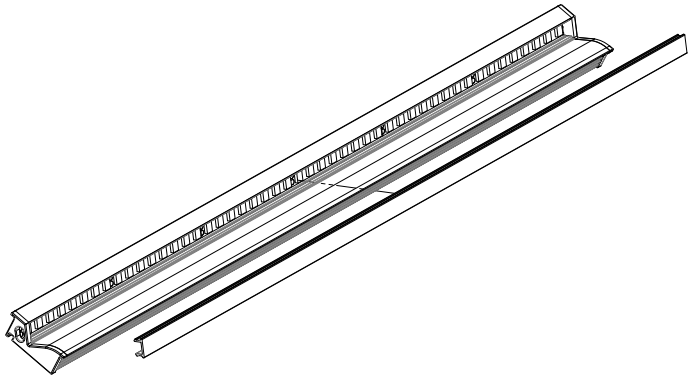

9. Cut opening in wall to length of extrusion plus **0.16”** for endcaps. Height of cutout should be **0.82”**.
    a. Fabriano is held into wall through press fit, wall cutout should be as close to housing dimensions as possible.
10. Connect the power lead to appropriate 24V DC power supply.
11. Apply a small bead of adhesive along the bottom and top of housing.
12. Insert Fabriano into wall opening.
13. Wipe off excess adhesive after insertion.

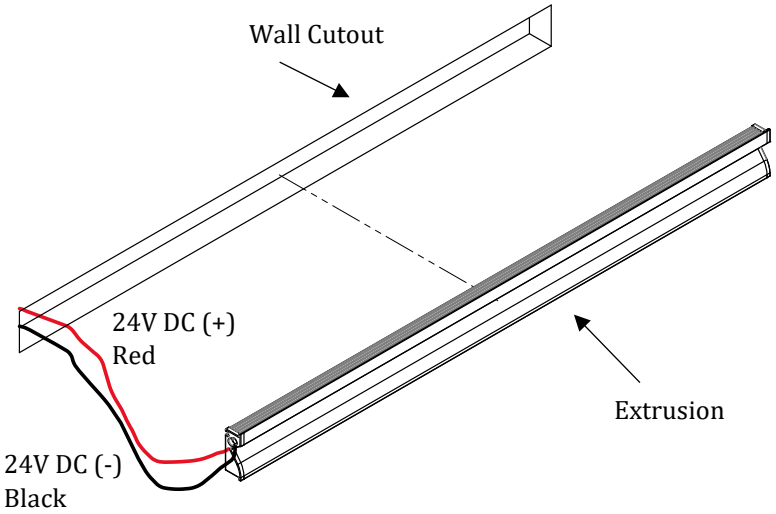

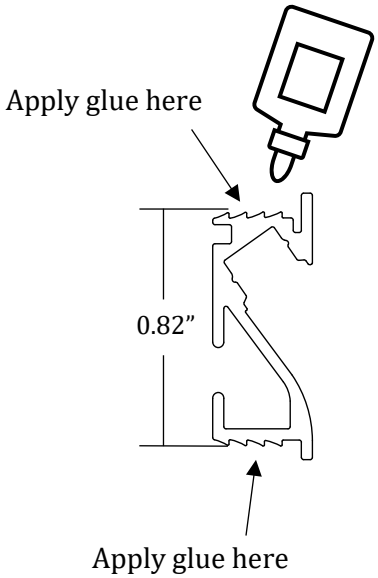

Copyright © 2023 Tivoli